

## MULTISTAGE, VERTICAL CAN PUMP

IN STANDARD DESIGN AND ALSO  
ACCORDING TO API 610 / TYPE VS6

### Design

- GDTV – vertical high-pressure pump of can-type design (VS6)
- GDV – vertical high-pressure pump of submerged pump (VS1)
- Suspended NPSH impeller of single-suction & double suction design, inducer version available
- Installation depth adapted to customer requirements
- Axial thrust compensation by means of single impeller balancing
- Product lubricated bearing bushes on all bowls in different material grades
- With impeller- and casing wear rings acc. to API 610
- Complete pump design for MAWP possible as well as dual pressure rating

### Shaft seal

- Seal chamber according to API 610
- All types of mechanical seal from single to double according to API 682 available
- Gland packing version are possible
- Cartridge design of mechanical seal as standard

### Operating data

	<b>GDTV</b>
Nozzel size (mm)	from 80 to 450
Capacity	up to 3200 m <sup>3</sup> /h
Head	up to 460 m
Speed	up to 1800 rpm
Operating temperature	up to +160 °C



### Modern type series with

- High efficiencies by mixed flow hydraulics
- Variety of different available hydraulics
- Minimum space requirements due to mixed flow design

# GDTV Version – VS6

## Mounting tool

- Special mounting tool for easy disassembling of thrust bearing and mechanical seal

## Seal chamber

- separate seal chamber according to API 610 / 682
- all the usual variations of sealing and API piping schemes are possible
- equipped as standard with a cartridge mechanical seal

## Shaft


- one-piece shafts up to 3.5 m length
- on higher suspension depths shafts consisting of several parts with intermediate coupling

## Suction can

- fabricated with full penetration welds and swirl breaks for uni form suction flow into the first stage

## Bearing

- liquid-lubricated plain bearing
- plain bearing materials adapted to process requirements

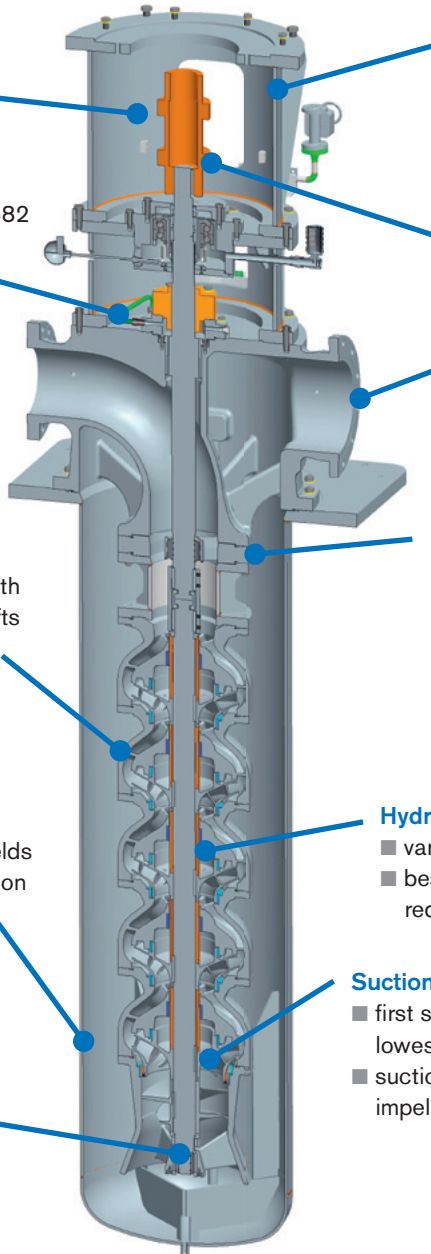

## Design

- solid lantern design for maximum run smoothness
- very low vibration values

## Coupling

- spacer coupling type for easier maintenance of mechanical seal

## Flanges

- ASME or DIN EN

## Wear rings

- replaceable wear rings
- clearances according to API 610
- different material options and coatings possible
- PEEK version with reduced clearances


## Hydraulics

- various hydraulics per type size
- best adaptation to customer's requirements ensured

## Suction stage

- first stage designed as NPSH stage for lowest NPSH values
- suction impeller as single-flow or double-flow impeller or with inducer

## Performance range

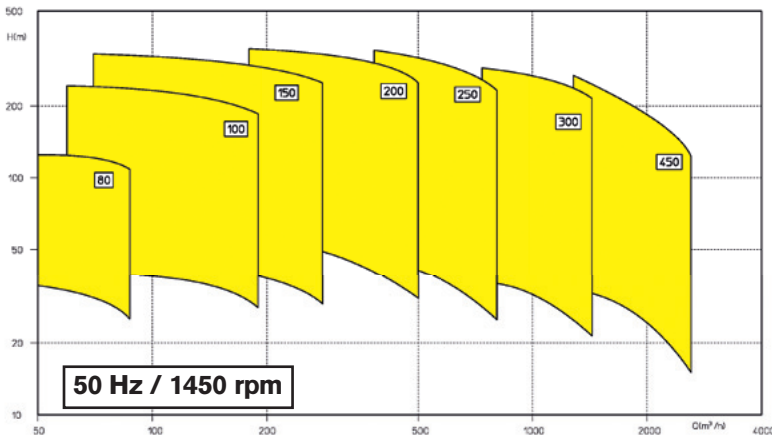

**APOLO**

– PUMPS –

A member of **HMS GROUP**



Apollo Gößnitz GmbH  
Walter-Rabold-Strasse 26  
04639 Goessnitz/Germany

Phone: +49 (0)3 44 93/ 77-0  
Fax: +49 (0)3 44 93/ 77-2 10  
E-mail: info@apollo-goessnitz.de  
www.apollo-goessnitz.de